

Gerade Verbindung, reduzierend



Gewicht

Siehe Tabelle unten

Technische Daten


Materialnummer	Lichtweite LW	Lichtweite LW2	Liefereinheit	Gewicht
1823386046	3 mm	3 mm	50 Stück	0,001 kg
1823386050	4 mm	3 mm	50 Stück	0,005 kg
1823386047	4 mm	4 mm	50 Stück	0,001 kg
1823386051	6 mm	4 mm	50 Stück	0,002 kg
1823386048	6 mm	6 mm	50 Stück	0,002 kg
1823386052	8 mm	4 mm	25 Stück	0,003 kg
1823386053	8 mm	6 mm	25 Stück	0,003 kg
1823386010	8 mm	8 mm	25 Stück	0,006 kg
1823386005	8 mm	13 mm	25 Stück	0,006 kg
1823386057	10 mm	6 mm	25 Stück	0,004 kg
1823386058	10 mm	8 mm	25 Stück	0,004 kg
1823386059	10 mm	10 mm	25 Stück	0,004 kg
1823386011	12 mm	12 mm	25 Stück	0,009 kg
1823386049	19 mm	19 mm	10 Stück	0,013 kg

LW = Innendurchmesser des zu verwendenden Schlauches

Technische Informationen

Werkstoff	
Werkstoff	Polyoxymethylen

Abmessungen

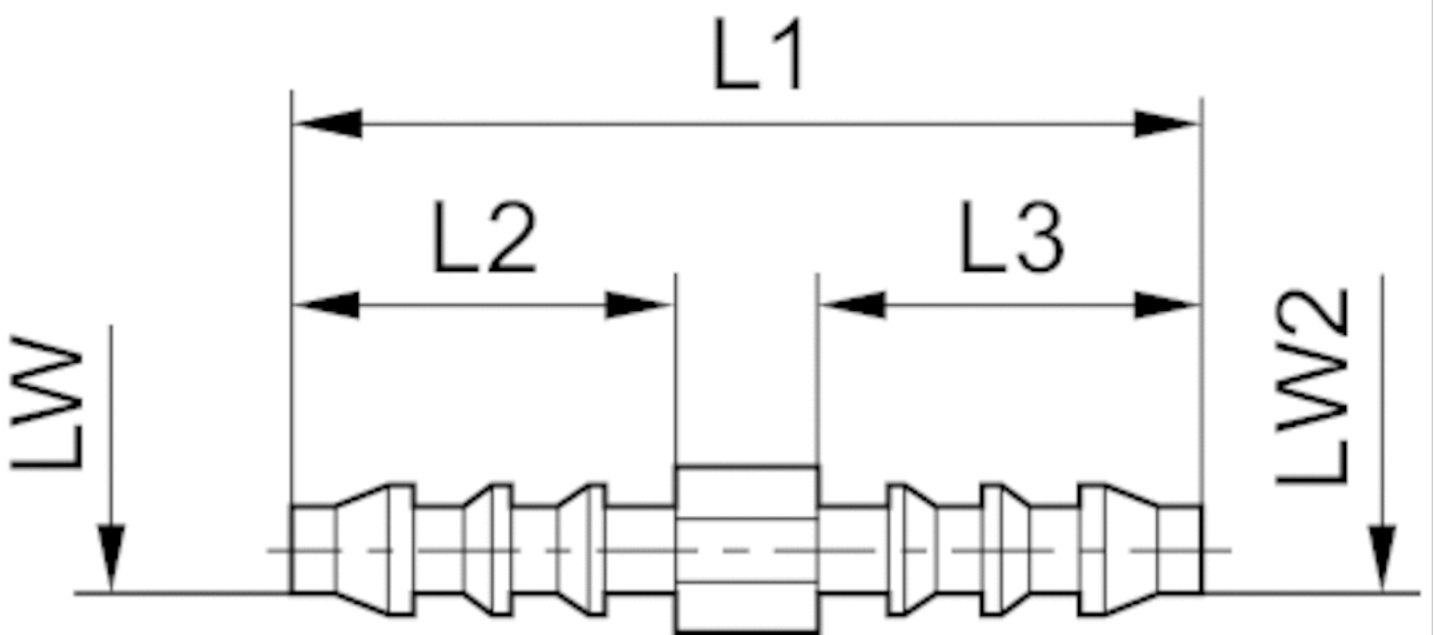

Abmessungen

Materialnummer	LW	LW2	L1	L2	L3
1823386046	3 mm	3 mm	25	10	10
1823386050	4 mm	3 mm	30	15	10
1823386047	4 mm	4 mm	35	14.5	14.5
1823386051	6 mm	4 mm	42.5	20.5	14.5
1823386048	6 mm	6 mm	49	20.5	20.5
1823386052	8 mm	4 mm	48	22.5	15
1823386053	8 mm	6 mm	54	23	20.5
1823386010	8 mm	8 mm	56	22	22

Materialnummer	LW	LW2	L1	L2	L3
1823386005	8 mm	13 mm	63	27.5	23
1823386057	10 mm	6 mm	56	25	20
1823386058	10 mm	8 mm	60.5	25	22.5
1823386059	10 mm	10 mm	63	25	25
1823386011	12 mm	12 mm	73	27	27
1823386049	19 mm	19 mm	76	32	32

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™