

# Serie QR2-S-RSK Standard

- Gerader Steckverbinder
- Steckanschluss
- Ø 4 Ø 5 Ø 6 Ø 8 Ø 10 Ø 12 Ø 14 Ø 16
- M28x1,5
- QR2-S-RSK



Betriebsdruck min./max.	-0,95 ... 16 bar
Umgebungstemperatur min./max.	-20 ... 80 °C
Gewicht pro Stück	Siehe Tabelle unten

## Technische Daten

Materialnummer	Anschluss G	Liefereinheit	Gewicht pro Stück
1823386077	Ø 4	10 Stück	0,012 kg
1823386078	Ø 5	10 Stück	0,014 kg
1823386079	Ø 6	10 Stück	0,016 kg
1823386080	Ø 8	10 Stück	0,023 kg
1823386081	Ø 10	10 Stück	0,043 kg
1823386082	Ø 12	5 Stück	0,052 kg
1823386083	Ø 14	5 Stück	0,075 kg
R412010539	Ø 16	1 Stück	0,114 kg

## Technische Informationen


Die Serien QR1 (Kunststoff) und QR2 (Metall) sind nicht kombinierbar

Weitere Informationen zu Montage und Toleranzen der verwendbaren Schläuche finden Sie im Dokument „Technische Informationen“ (erhältlich im MediaCentre).


## Technische Informationen

Werkstoff	
Gehäuse	Messing, vernickelt
Dichtung	Acrylnitril-Butadien-Kautschuk
Zahnscheibe	Nichtrostender Stahl
Lösering	Messing, vernickelt

# Abmessungen

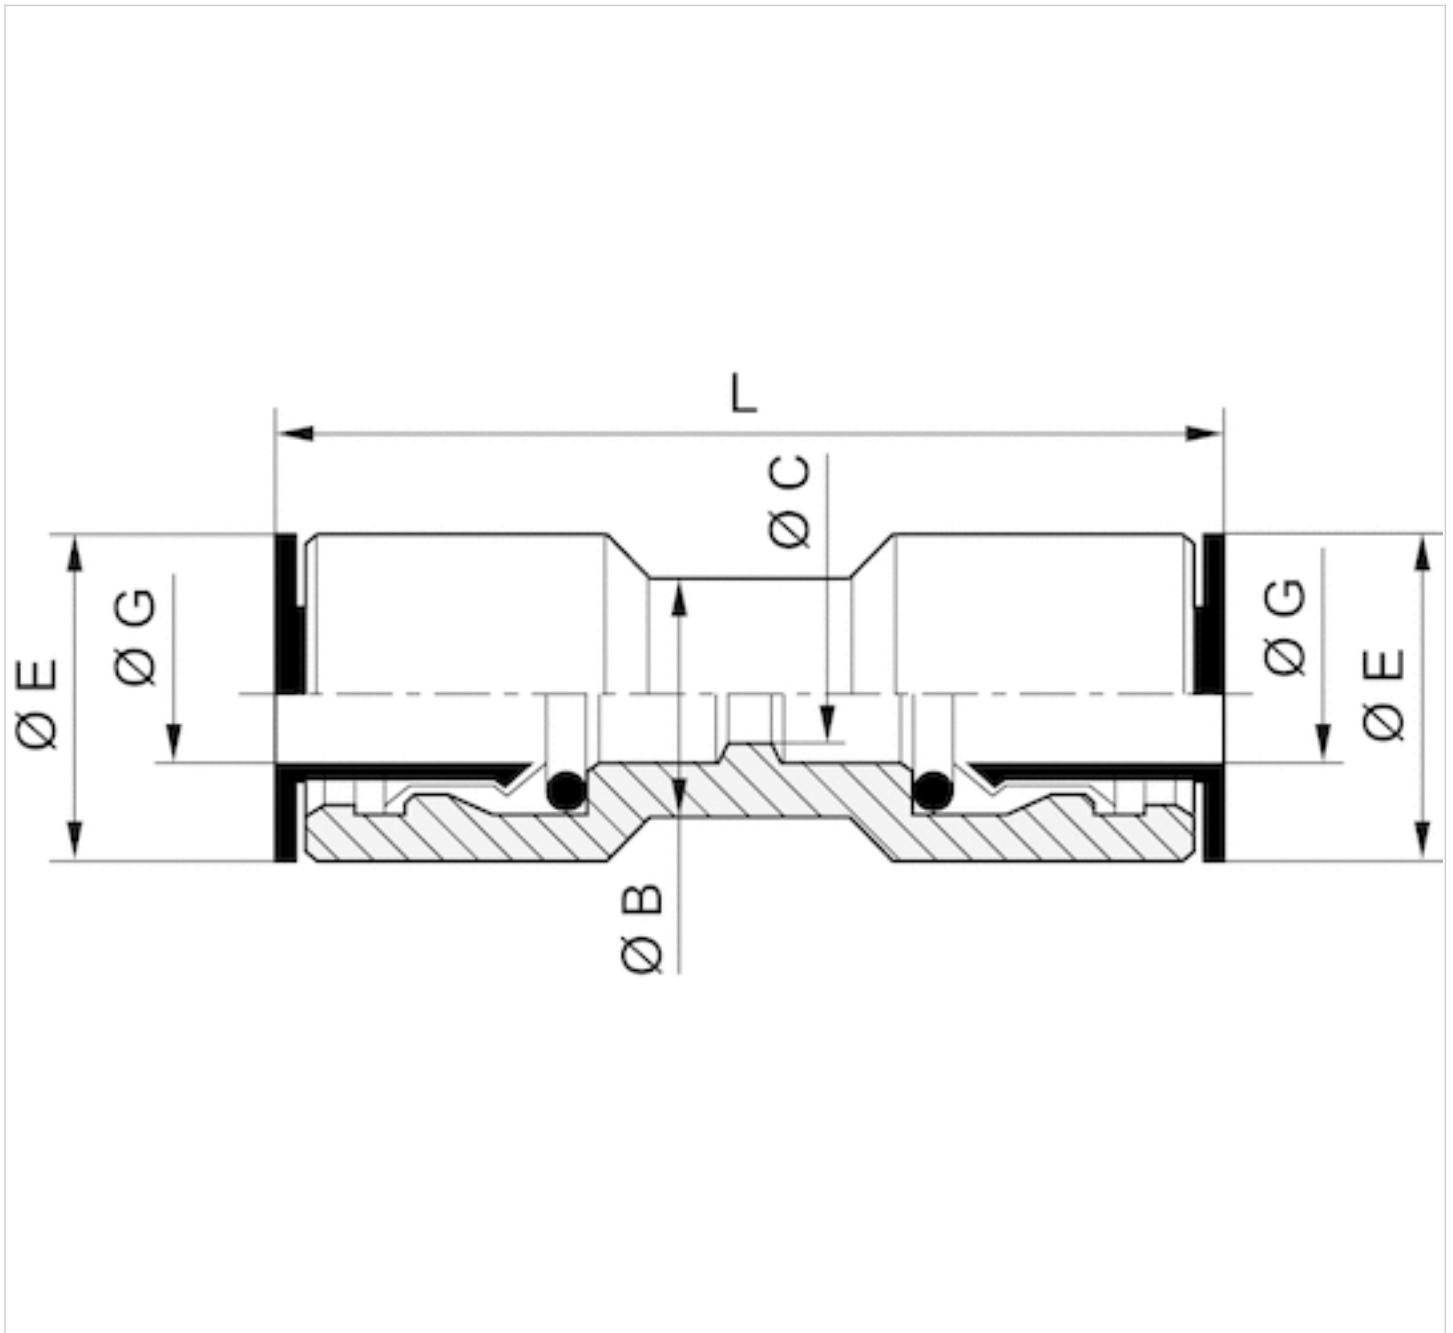

## Abmessungen für Verschraubung mit Außengewinde

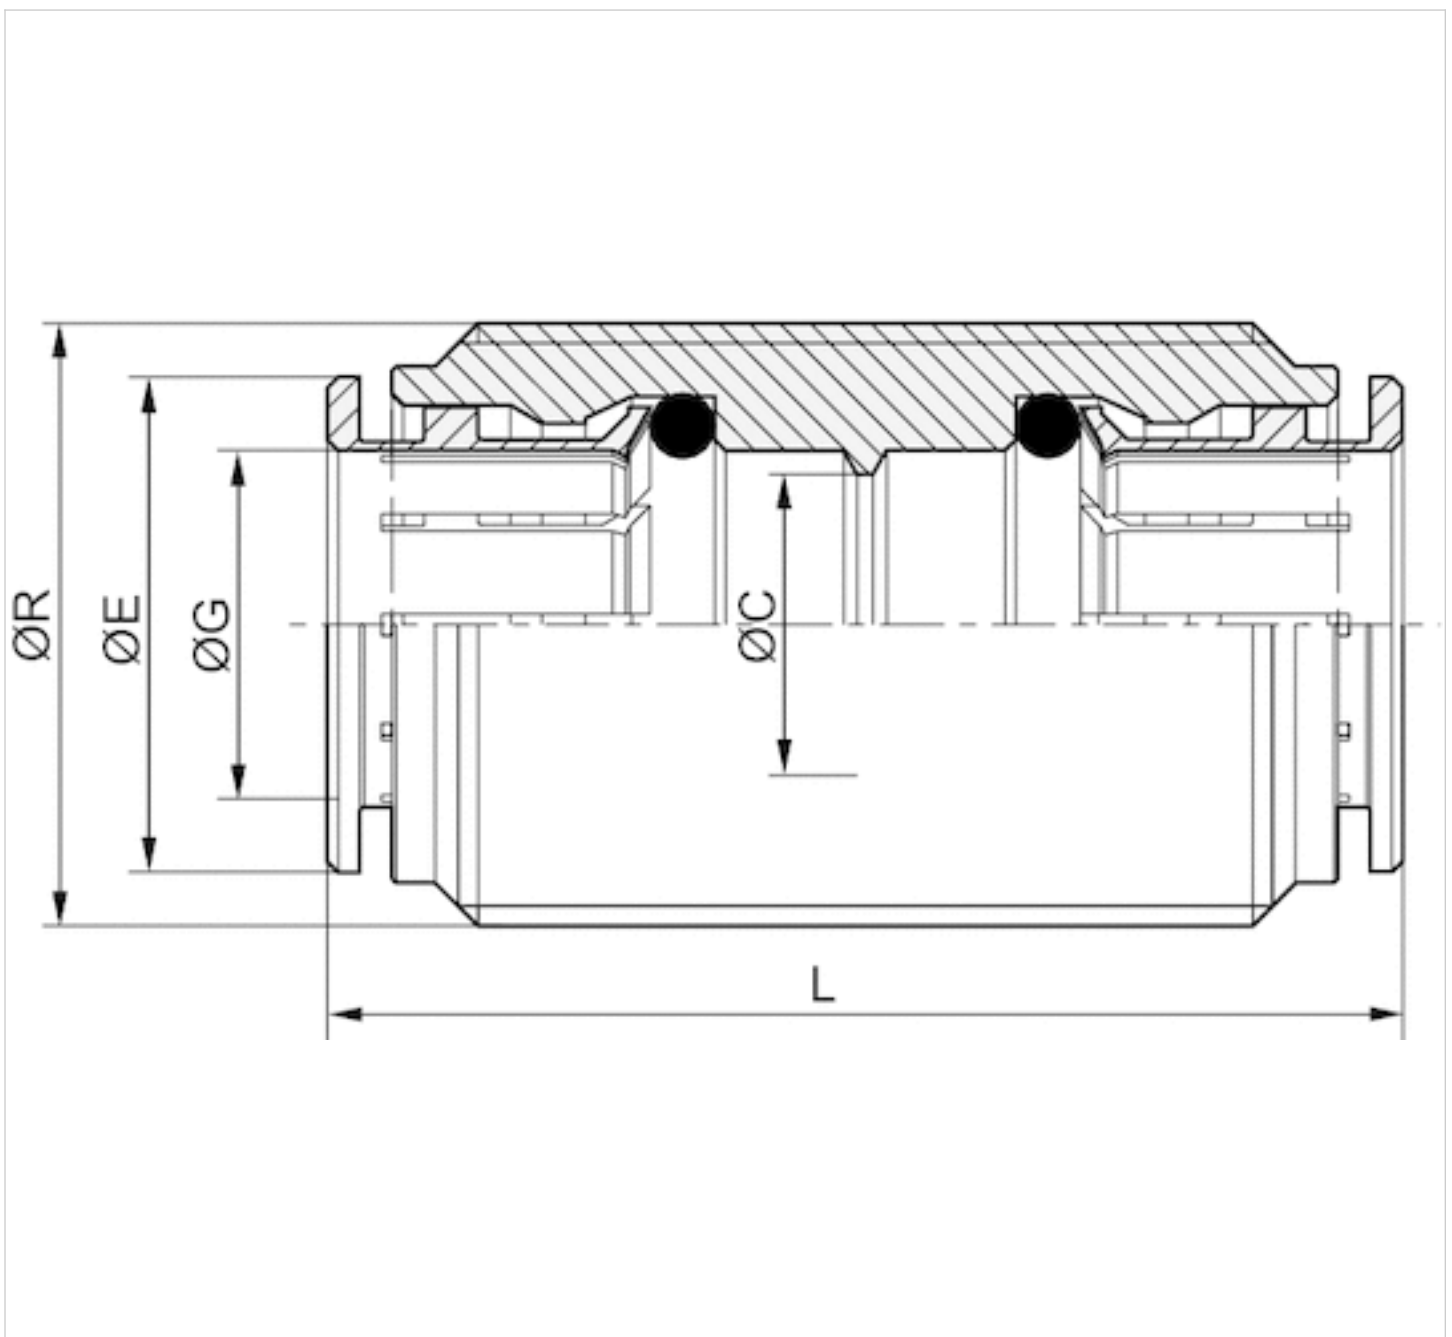

## Abmessungen

Materialnummer	Anschluss R	Anschluss G	$\varnothing B$	$\varnothing C$	$\varnothing E$	L
1823386077	-	$\varnothing 4$	7	3	9	30
1823386078	-	$\varnothing 5$	8	4	9.5	32
1823386079	-	$\varnothing 6$	10	5	11	31.5
1823386080	-	$\varnothing 8$	12	7	13	36
1823386081	-	$\varnothing 10$	13	9	15	37
1823386082	-	$\varnothing 12$	16	11	17	40.5
1823386083	-	$\varnothing 14$	18	12	20	45
R412010539	M28x1,5	$\varnothing 16$	-	14	23	50

# Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.  
2021-08



**CONSIDER IT SOLVED™**